



MyPower S3300 Series L2+ Gigabit Aggregation Switch Datasheet

Maipu Communication Technology Co., Ltd
No. 16, Jiuxing Avenue
Hi-Tech Park
Chengdu, Sichuan Province
P. R. China
610041
Tel: (86) 28-85148850, 85148041
Fax: (86) 28-85146848, 85148139
URL: [http:// www.maipu.com](http://www.maipu.com)
Mail: overseas@maipu.com

All rights reserved. Printed in the People's Republic of China.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written consent of Maipu Communication Technology Co., Ltd.

Maipu makes no representations or warranties with respect to this document contents and specifically disclaims any implied warranties of merchantability or fitness for any specific purpose. Further, Maipu reserves the right to revise this document and to make changes from time to time in its content without being obligated to notify any person of such revisions or changes.

Maipu values and appreciates comments you may have concerning our products or this document. Please address comments to:

Maipu Communication Technology Co., Ltd
No. 16, JiuXing Avenue, Hi-Tech Park
Chengdu, Sichuan Province
P. R. China
610041
Tel: (86) 28-85148850, 85148041
Fax: (86) 28-85146848, 85148139
URL: [http:// www.maipu.com](http://www.maipu.com)
Mail: overseas@maipu.com

All other products or services mentioned herein may be registered trademarks, trademarks, or service marks of their respective manufacturers, companies, or organizations.

Contents


Overview	4
Key Features	5
Product Features	6
Specifications	8
Order Information	10

Overview

MyPower S3300 Series L2+ gigabit aggregation switch is the new version of S3300 Series, it is developed by Maipu for the telecom and ISP market, it is positioning at broadband network aggregation area. It provides the stable, reliable and secure high-performance switching service.

MyPower S3300-28TX-AC provides 24*1000M electric interfaces and 4* 1000M Combo interfaces, 4*10G SFP+ interfaces, AC Power Supply.

MyPower S3300-28FC-AC provides 20*1000M SFP interfaces and 4*1000M Combo interfaces, 4*10G SFP+ interfaces, AC Power Supply.

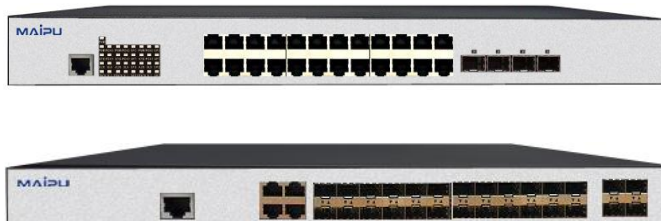

S3300 L2+ Gigabit Switch Series

MyPower S3300 Series provides the perfect solutions in the aspects of multi-service capability, security, reliability, management and maintenance. It is the idle access device of the industry users and carriers. The system provides the security features, such as 802.1X access authentication and ARP anti-attack, which can prevent the virus and vicious attacks and is suitable for the networks with large scale, multiple services and complicated traffic. It has powerful multicast and QoS capability, meeting the real-time requirements of the enterprise network video, audio data and other high-priority services. Besides, It supports QinQ, VLAN Mapping, and multi-service access capabilities. MyPower S3300 series can provide the low-cost, high-performance, and easy-management solutions for the enterprise network center, IP MAN and district network access.

Key Features

- **High-density and expansibility**
- **Higher performance of the hardware**
- **Multi-service supporting capability**
- **Perfect security policy**
- **Rich QoS mechanism**

Product Features

- **Multi-service supporting capability**

MyPower S3300 series switch supports QinQ and VLAN Mapping and provides the flexible solutions for the multi-service isolation of the industry users and the MAN services of carriers.

S3300 supports IGMP Snooping and multicast VLAN technology, which is suitable for the triple-play services of carriers and video communication requirement of the enterprise network customers.

- **Perfect security policy**

MyPower S3300 supports 802.1x and MAC address authentication function and the static or dynamic binding of the user account, IP and port, realizes the delivering and management of user policies, and diagnoses the network illegal actions in real time.

MyPower S3300 provides the ARP Guard technology to prevent the ARP spoofing attack and supports the AM function to filter the packets forwarded by the ports.

MyPower S3300 supports extended ACL. It can classify the data flow according to the destination/source MAC address, source/destination IP address, UDP/TCP port number and protocol type. Meanwhile, it supports the ACL based on time domain and VLAN-based ACL and realizes the hierarchical access control flexibly.

- **Rich QoS mechanism**

MyPower S3300 provides four port queues, supports 802.1P/DSCP/TOS priority marking and mapping, and provides various priority queue scheduling algorithms, such as SP and WRR. It can realize the QoS

functions, such as port speed limitation and traffic monitoring, meeting the requirement of the user network for data processing priority.

Specifications

Product Model	SM3300-28TX-AC	SM3300-28FX-AC
Product configuration		
Structure	Desk-top	
Fixed ports	24*1000M electric interfaces and 4* 1000M Combo interfaces, 4*10G SFP+ interfaces, Fixed One AC Power Supply.	20*1000M SFP interfaces and 4*1000M Combo interfaces, 4*10G SFP+ interfaces, Fixed One AC Power Supply.
Performance parameter		
Switching capability	128Gbps	
MAC entries	16K	
VLAN	4K	
Jumbo frames	12K	
ACL	2K	
QinQ	Yes	
Queue/Port	8	
Multicast groups	1K	
Standards & Protocols		
L2 protocol	VLAN,GVRP, STP/RSTP/MSTP, BPDU Tunnel, BPDU guard, supporting 16 spanning tree instances; Traffic control, broadcast storm suppression, external loop detection, link aggregation, Port mirroring, LLDP, Aging time and add/remove static MAC, QinQ, VLAN Mapping	
Multicast	IGMP Snooping, Fast leave, multicast VLAN, controllable multicast, MLD	
L3 protocol	Static route	
QoS	Each port supports 8 queues; Supporting 802.1p/TOS/DSCP priority and mapping; Port speed limitation and traffic monitoring; Queue scheduling: SP, WRR,SP+WRR; Bandwidth control based on MAC Sour.&Dest. , IP Add. , TCP Port and UDP Port	
Application protocol	FTP, TFTP, HTTP, SNMP, DNS Client DHCP Client, DHCP Snooping, Option82	
Security mechanism	Supporting 802.1X , Port isolation IP+MAC+Port+VLAN binding manually MAC address binding and MAC quantity limitation ARP packet speed limitation and ARP Guard Standard ACL and extended ACL Supporting CPU protection Anti-DOS attack Telnet based on Security IP Prevent unauthorized user	
Management	SHELL, WEB, TELNET, SSH, SNMP V1/V2/V3, MIB	

IEEE standards	IEEE 802.3 (10BASE-T) IEEE 802.3z (1000BASE-X) IEEE 802.3ae (10G BASE) IEEE 802.3ad (Link Aggregation) IEEE 802.1d (STP) IEEE 802.1w (RSTP) IEEE 802.1p (Cos priority)	IEEE 802.3u (100BASE-T) IEEE 802.3ab (1000BASE-T) IEEE 802.1ad (QinQ) IEEE 802.3x (Flow Control) IEEE 802.1Q (Virtual LAN) IEEE 802.1s (MSTP) IEEE 802.1x (port authentication)
Physical index		
Dimension (W×D×H) mm	440*220*44mm	440*280*44mm
Power supply		
Input voltage	AC: 90~265V, 47~67Hz	
Power consumption (MAX)	≤40W	≤60W
Net Weight (kg)	≤3kg	≤4kg
Environment parameter		
Working temperature	0-50℃	
Working humidity	10-90% no-condensing	
MTBF	85,000 Hours	

Order Information

Product	Description
SM3300 Gigabit Ethernet switch host	
SM3300-28TX-AC	24*1000M electric interfaces and 4* 1000M Combo interfaces, 4*10G SFP+ interfaces, Fixed One AC Power Supply.
SM3300-28FX-AC	20*1000M SFP interfaces and 4*1000M Combo interfaces, 4*10G SFP+ interfaces, Fixed One AC Power Supply.